

**D.A.V PUBLIC SCHOOL**  
**Danibigha, Aurangabad**


---

**TENDER NOTICE**

**Date:-**

.....

Sealed quotations are invited from interested parties through registered post/by hand for installation of Paver Blocks in the campus of D.A.V Public School, Danibigha, Aurangabad. For specification and other details please visit the school Website <https://davdanibigha.com/> or scan the QR code.

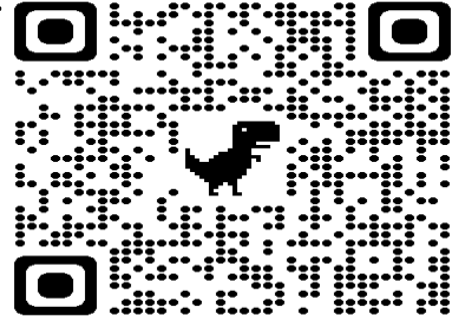

Or the Notice Board in the school campus.

Name of the Work	Installation of Paver Blocks
Time of Completion of proposed work	20 days
Date of Tender Notification	16/05/2024
Last Date/Time for receipt of Bids	22/05/2024
Name and address of official who inviting Tender	Headmistress DAV Public School, Danibigha, Aurangabad (Bihar)- 824101
Contact Number	9608862226

**Mrs. Alpana Mishra**  
**Headmistress**

**Mr. S.K. Jha**  
**Manager**

**Mr. A.K. Jana**  
**ARO, BR Zone-F**

Ref no ...DAVDANIBIGHA2024-25/57.....

Date .....16/05/2024.....

ABSTRACT OF COST FOR PAVER LAYING IN GROUND AT DAV PUBLIC SCHOOL, DANIBIGHA, AURANGABAD (BIHAR)

S.no.	D.S.R	DESCRIPTION	QTY	RATE	UNIT	AMOUNT
		AREA	12581		SQFT	
2	11.79.1	Providing and laying factory made chamfered edge Cement Concrete paver blocks of required strength,thickness & size/shape, made by table vibratory method , to attain superior smooth finish using PU or equivalent moulds, laid in required Grey colour & pattern over 50mm thick compacted bed of coarse sand, compacting and proper embedding / laying of inter locking paver blocks into the sand bedding layer through vibratory compaction by using plate vibrator, filling the joints with jamuna sand and cutting of paver blocks as per required size and pattern, finishing and sweeping extra sand in footpath, parks,lawns, drive ways or light traffic parking etc. all complete as per manufacturer's specifications & direction of Engineer -in-Charge: with approved colour design and pattern.	1169.2	sqm		
3	MR	Supplying and Filling in plinth with local sand and under floors including, watering, ramming consolidating and dressing complete.	356.6	cum		
			<b>GRAND TOTAL</b>			
			<b>RATE PER SQFT</b>			
<b>SAY TOTAL -</b>						

Corrigendum:- It is 80mm Paver Block Instead of 50mm.

Note: Rates are inclusive of GST.

Warden Way  
Main site plan - later



**TOTAL AREA FOR PAVEMENT**

- AREA 1 - 7661 SQFT
- AREA 2 - 2906 SQFT
- AREA 3 - 2014 SQFT
- TOTAL = 12581 SQFT