


D.A.V PUBLIC SCHOOL
Danibigha, Aurangabad

TENDER NOTICE

Dated:-02/07/2025

Sealed quotations are invited from registered parties through Registered post/by hand for Installation of Kota Stone in the Classrooms. For specifications and other details please visit the school Website <https://davdanibigha.com/> or scan the QR code.

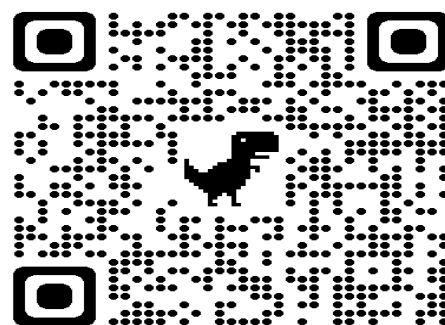

Or the Notice Board in the school campus.

| | |
|--------------------------------------------------|-----------------------------------------------------------------------------|
| Name of the Work | Installation of Kota Stone in the Classrooms |
| Date of Tender Notification | 02/07/2025 |
| Last Date/Time for receipt of Bids | 10/07/2025 |
| Name and address of Official who inviting Tender | Headmistress DAV Public School, Danibigha, Aurangabad (Bihar)- 824101 |
| Contact Number | 9608862226 |

Mrs. Alpana Mishra
Headmistress

Mr. S.K. Jha
Manager

Mr. S.K. Jha
Regional Officer, BR Zone- A & F

**ABSTRACT OF COST FOR KOTA STONE LAYING IN ALL CLASSROOMS AT D.A.V PUBLIC SCHOOL,
DANIBIGHA, AURANGABAD, BIHAR**

Ref no

Date

| Serial | SoR | Particulars | Quantity | Rate | Unit | Amount |
|--------|-----|----------------------------------|-----------------|------|-------------|--------|
| | | GROUND FLOOR | | | | |
| | | classroom 1 - (20' x22'3") | 446.0 | | | |
| | | classroom 2 - (20' x22'4") | 448.0 | | | |
| | | classroom 3 - (20' x21'10") | 436.0 | | | |
| | | FIRST FLOOR | | | | |
| | | classroom 4 - (21'6" x20') | 430.0 | | | |
| | | classroom 5 - (21'8" x20') | 434.0 | | | |
| | | classroom 6 - (20' x22'3") | 446.0 | | | |
| | | classroom 7 - (20' x22'4") | 448.0 | | | |
| | | classroom 8 - (20' x21'10") | 436.0 | | | |
| | | classroom 9 - (22'4"X19'10") | 444.0 | | | |
| | | classroom 10 - (21'6" x19'10") | 426.0 | | | |
| | | classroom 11 - (24'1" x 19'10") | 477.0 | | | |
| | | classroom 12 - (22'4" x 19'10") | 444.0 | | | |
| | | SECOND FLOOR | | | | |
| | | classroom 13 - (22'6" x 20') | 450.0 | | | |
| | | classroom 14 - (22'6" x 20') | 450.0 | | | |
| | | classroom 15 - (22'6" x 20') | 450.0 | | | |
| | | classroom 16 - (14' x 20') | 280.0 | | | |
| | | classroom 17 - (20' x22'3") | 446.0 | | | |
| | | classroom 18 - (20' x22'4") | 448.0 | | | |
| | | classroom 19 - (20' x21'10") | 436.0 | | | |
| | | classroom 20 - (22'4"X19'10") | 444.0 | | | |
| | | classroom 21 - (21'6" x19'10") | 426.0 | | | |
| | | classroom 22 - (24'1" x 19'10") | 477.0 | | | |
| | | classroom 23 - (22'4" x 19'10") | 444.0 | | | |
| | | THIRD FLOOR | | | | |
| | | classroom 24 - (22'6" x 20') | 450.0 | | | |
| | | classroom 25 - (22'6" x 20') | 450.0 | | | |
| | | classroom 26 - (22'6" x 20') | 450.0 | | | |
| | | classroom 27 - (14' x 20') | 280.0 | | | |
| | | classroom 28 - (20' x22'3") | 446.0 | | | |
| | | classroom 29 - (20' x22'4") | 448.0 | | | |
| | | classroom 30 - (20' x21'10") | 436.0 | | | |
| | | classroom 31 - (22'4"X19'10") | 444.0 | | | |
| | | classroom 32 - (21'6" x19'10") | 426.0 | | | |
| | | classroom 33 - (24'1" x 19'10") | 477.0 | | | |
| | | classroom 34 - (22'4" x 19'10") | 444.0 | | | |
| | | TOTAL AREA OF KOTA WORK | 14817.00 | | SQFT | |
| | | TOTAL AREA OF 6" SKIRTING | 1421.3 | | SQFT | |
| | | TOTAL AREA OF KOTA WORK | 16238.30 | | SQFT | |

| Serial | SoR | Particulars | Quantity | Rate | Unit | Amount |
|---------------------|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------|------|--------|
| 1 | | Kota stone slab flooring over 20 mm (average) thick base laid over and jointed with grey cement slurry mixed with pigment to match the shade of the slab including rubbing and polishing complete . Base with 1:1:1 (1 lime : 1 surkhi: 1 coarse sand) / 1:4 (1 cement: 4 coarse sand) 20 TO 25 MM THICK | 1,509.1 | | Sq M | |
| TOTAL | | | | | | |
| | | | Rate per sqft | | | |
| SAY TOTAL -/- | | | | | | |
| ONLY | | | | | | |

Note:

Rates are inclusive of GST

Payment to be processed as per the amount of work done on site